

## Description


Open - Jamb with closer block

### Identifier

1.24

### NSAI modeller no.

TM/02

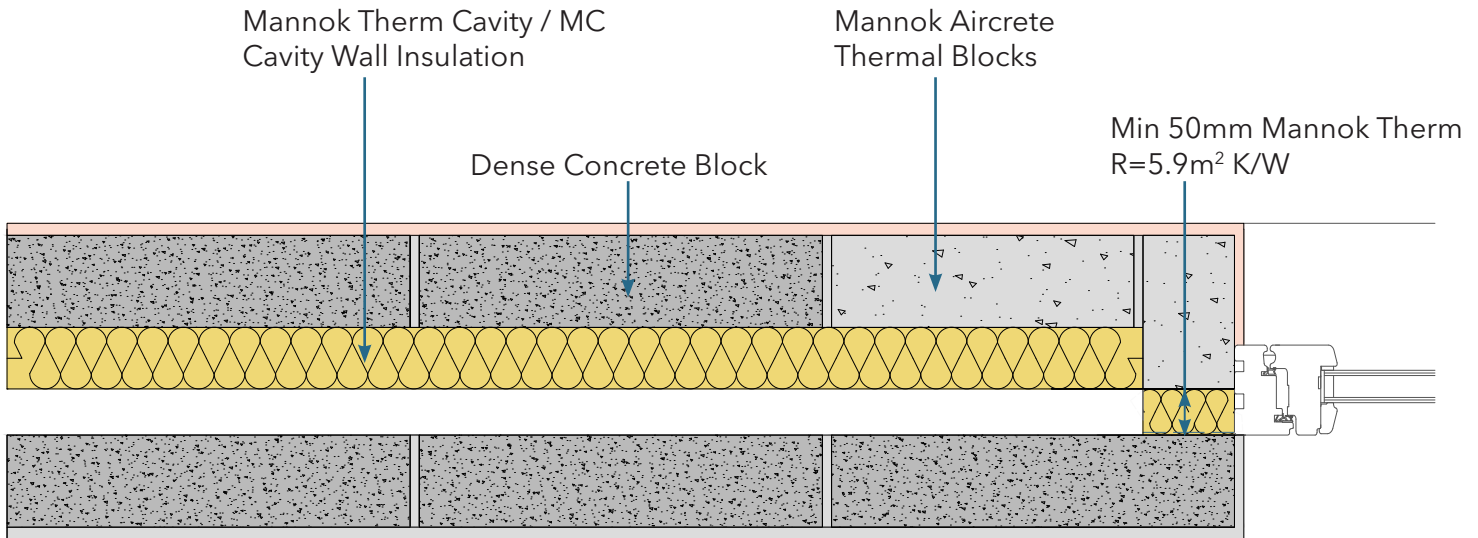

	A		B		C		D	
	Wall U-value 0.21W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m <sup>2</sup> K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	0.001	0.91	0.001	0.96	0.013	0.90	0.009	0.95
Mannok Aircrete Standard	0.006	0.91	0.005	0.96	0.018	0.90	0.012	0.95
Mannok Aircrete Seven	0.008	0.91	0.006	0.95	0.020	0.90	0.013	0.95

## Notes

Cavity Closer to have minimum R-value of 2.27 m<sup>2</sup>K/W.

