


Description

Eaves - Unventilated/Ventilated - Insulation between and under rafters - Dormer

Identifier

NSAI modeller no.

- 2.08
- 2.09
- 2.10.1
- 2.11.1

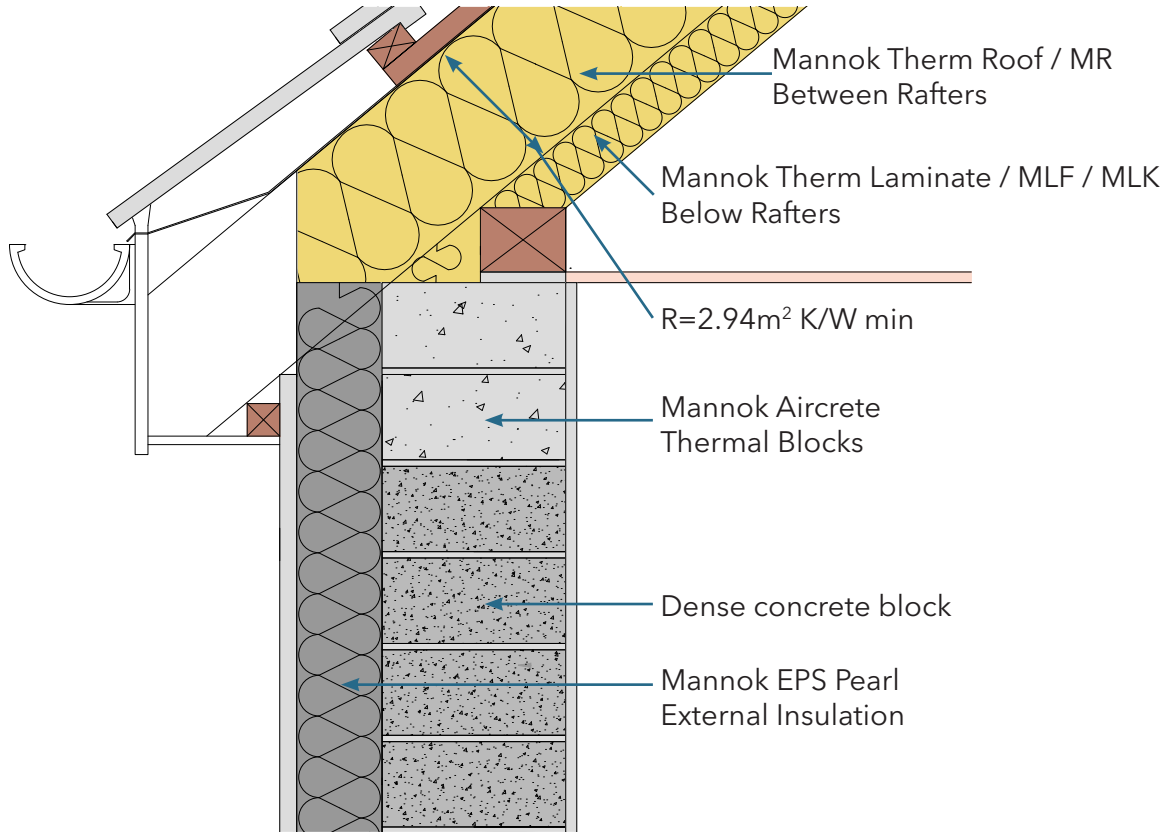

	A	B	C
	Wall U-value 0.21W/m2K (partial fill insulation only) Roof = 0.16, Floor = 0.21	Wall U-value 0.15W/m2K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15	Wall U-value 0.15W/m2K (partial fill insulation only) Roof = 0.14, Floor = 0.15

Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	0.029	0.91	0.041	0.92	0.058	0.92
Mannok Aircrete Standard	0.032	0.92	0.043	0.92	0.061	0.92
Mannok Aircrete Seven	0.033	0.92	0.043	0.92	0.062	0.92

Notes

Eaves corner insulation between wall plate and ventilated space has a min. R-value of 2.94 m2K/W.

