

Description


Eaves - Unventilated - Insulation between and over rafters - Pitched ceiling

Identifier

2.12.1

NSAI modeller no.

TM/02

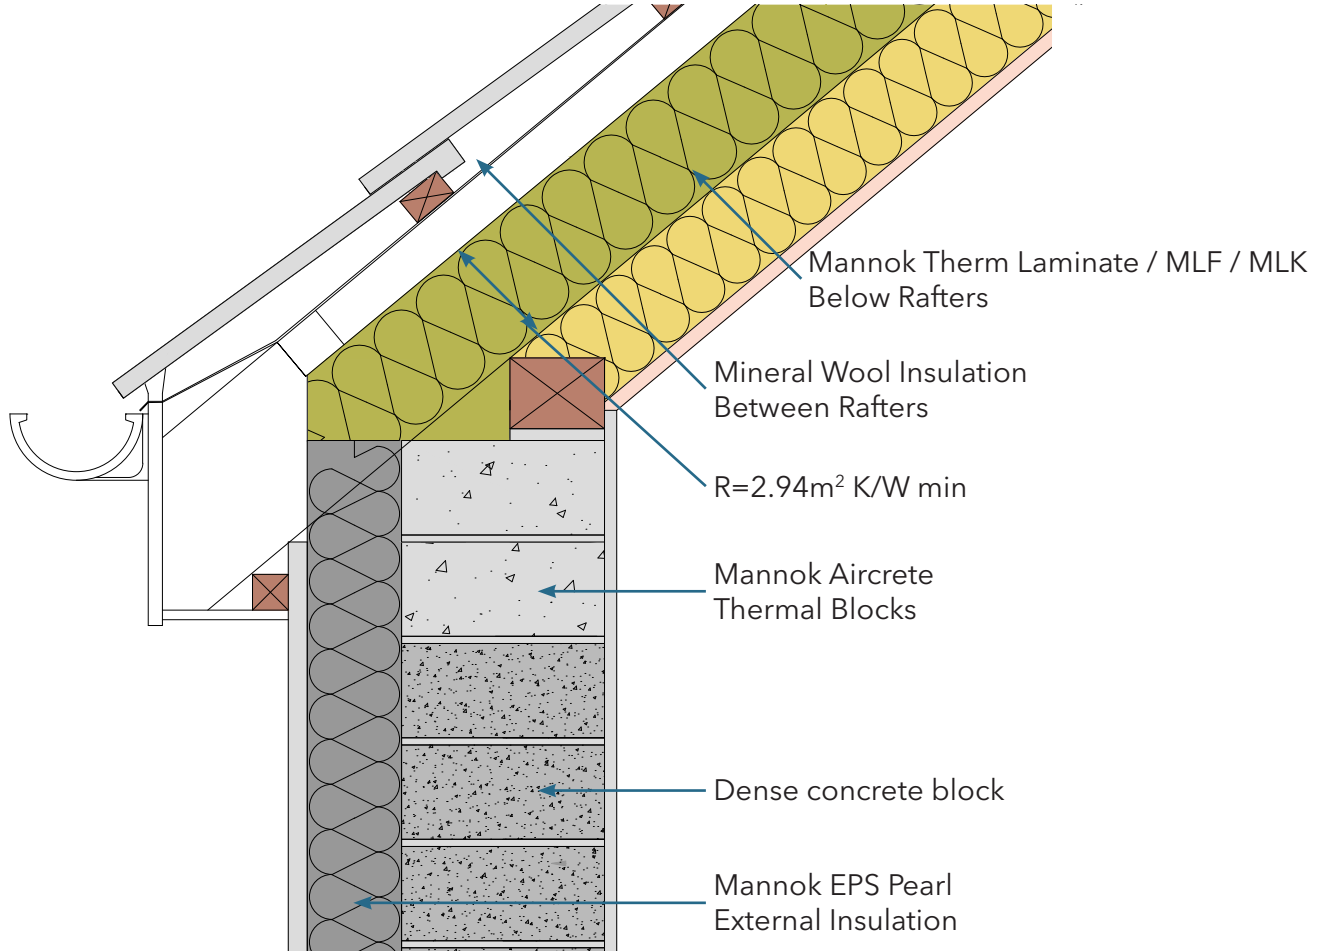

	A	B	C
	Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21	Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15	Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15

Inner leaf type	A		B		C	
	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	0.001	0.92	0.016	0.92	0.015	0.94
Mannok Aircrete Standard	0.004	0.92	0.019	0.92	0.017	0.94
Mannok Aircrete Seven	0.005	0.92	0.020	0.92	0.018	0.94

Notes

Gap between wall plate and eaves slope to have a min R-value of 2.8 m²K/W.
Three courses of Mannok under wallplate

