

## Description


Ope - Jamb

### Identifier

2.21

### NSAI modeller no.

TM/02

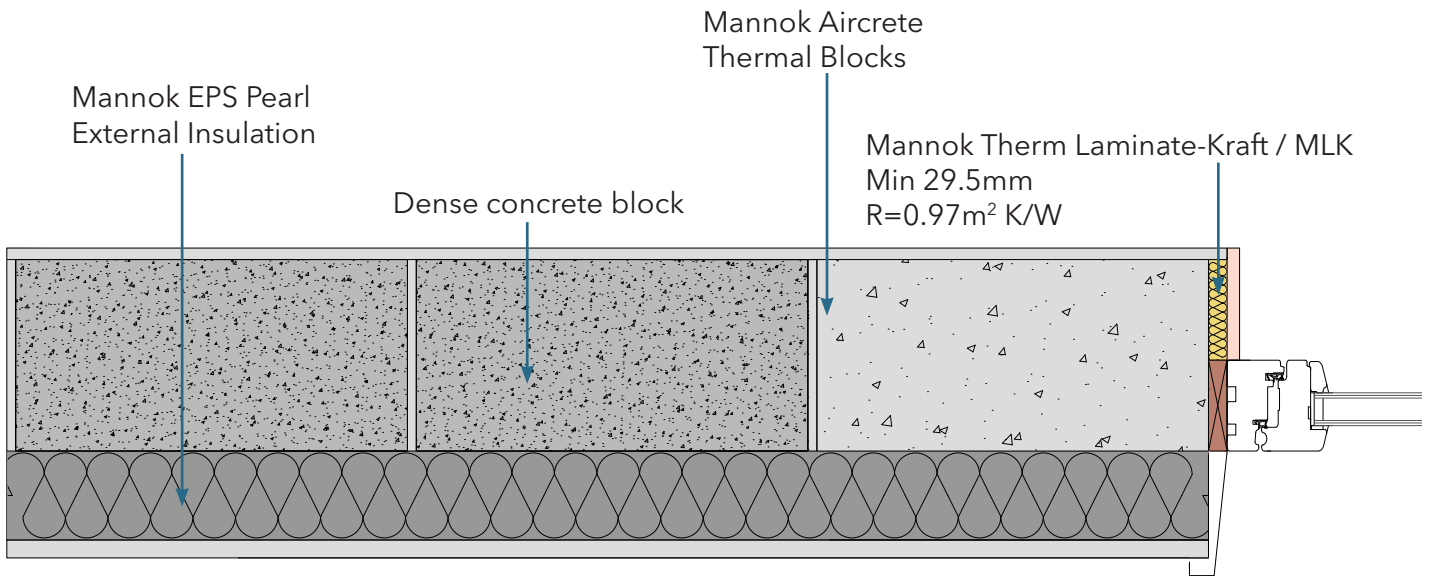

	A	B	C
	Wall U-value 0.21W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.16, Floor = 0.21	Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15	Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.14, Floor = 0.15

Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	-0.037	0.94	-0.013	0.96	-0.002	0.97
Mannok Aircrete Standard	-0.024	0.94	-0.005	0.96	0.006	0.97
Mannok Aircrete Seven	-0.021	0.94	-0.002	0.96	0.008	0.96

## Notes

Ensure external wall insulation with a min. R-value of 0.97 m<sup>2</sup>K/W overlaps the window frame

