

## Description


Sill

### Identifier

2.22

### NSAI modeller no.

TM/02

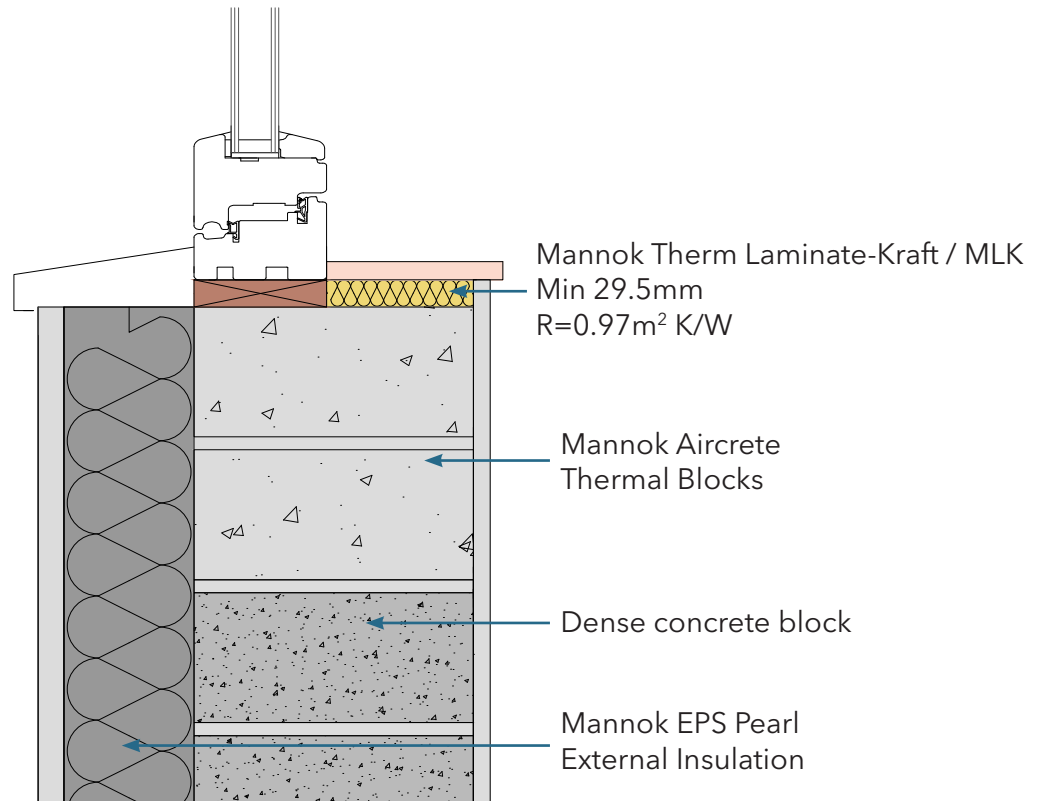

	A	B	C
	Wall U-value $0.21\text{W/m}^2\text{K}$ (partial fill insulation only) Roof = 0.16, Floor = 0.21	Wall U-value $0.15\text{W/m}^2\text{K}$ (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15	Wall U-value $0.15\text{W/m}^2\text{K}$ (partial fill insulation only) Roof = 0.14, Floor = 0.15

Inner leaf type	A		B		C	
	$\Psi$ -value (W/mK)	Temperature factor (fRsi)	$\Psi$ -value (W/mK)	Temperature factor (fRsi)	$\Psi$ -value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	0.002	0.94	0.012	0.95	0.018	0.96
Mannok Aircrete Standard	0.006	0.94	0.016	0.95	0.022	0.96
Mannok Aircrete Seven	0.007	0.94	0.017	0.95	0.023	0.96

## Notes

Insulation to cover window cill externally and internally by min 15mm

