

Description


Ope - cill

Identifier

6.21

NSAI modeller no.

TM/02

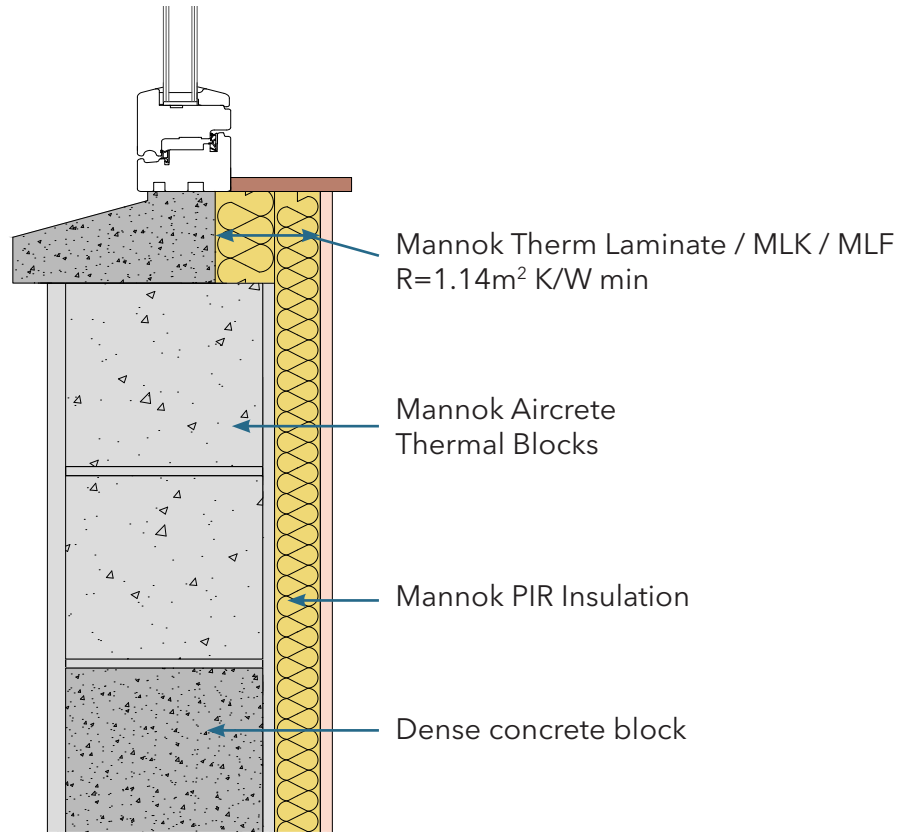

	A		B		C	
	Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
Mannok Aircrete Super	-0.019	0.91	-0.005	0.90	-0.003	0.90
Mannok Aircrete Standard	-0.015	0.91	-0.003	0.90	-0.002	0.90
Mannok Aircrete Seven	-0.014	0.91	-0.003	0.90	-0.001	0.90

Notes

Minimum R-value of 0.65 m²K/W under cill. Insulation behind cill to have a minimum R-value of 5.9 m²K/W

