

Description


Steel Partition Wall through ground floor

Identifier

5.22.2

NSAI modeller no.

TM/02

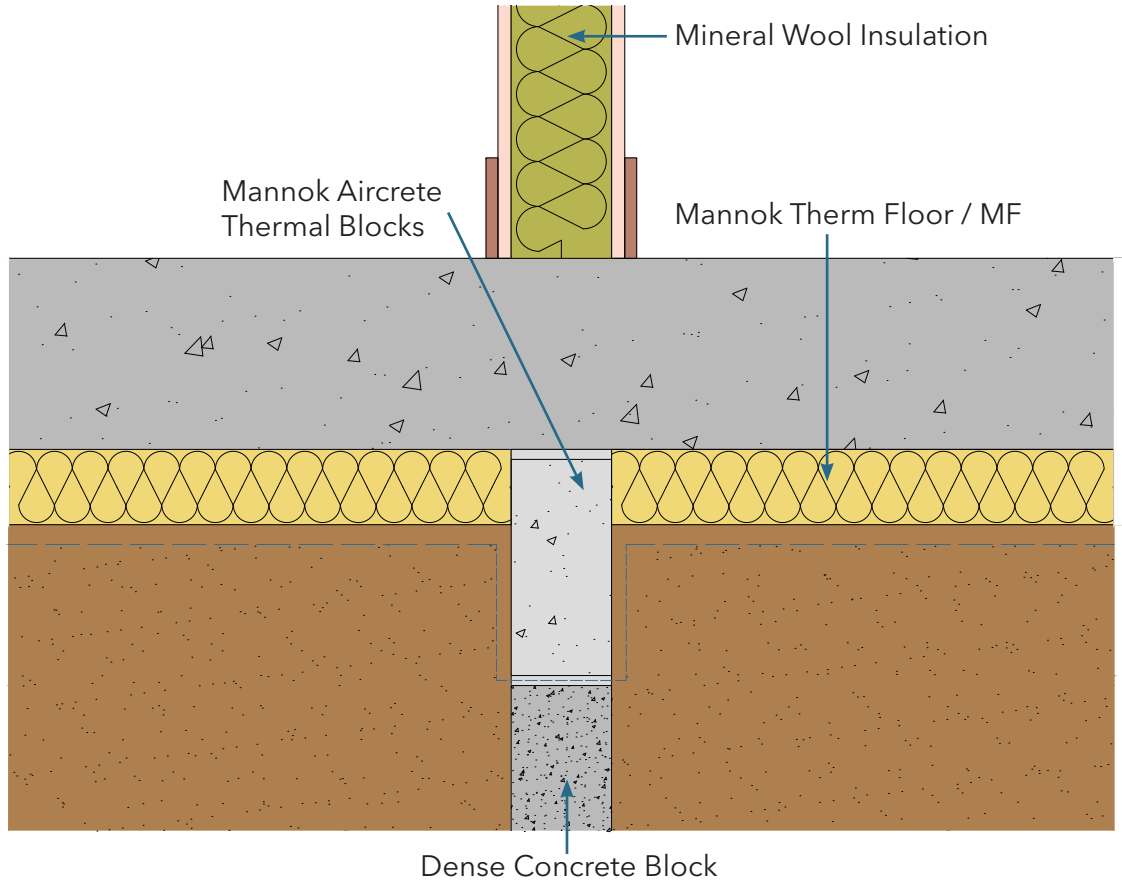

| Inner leaf type | A | | B | | C | |
|--------------------------|---|---------------------------|---|---------------------------|---|---------------------------|
| | Ψ -value (W/mK) | Temperature factor (fRsi) | Ψ -value (W/mK) | Temperature factor (fRsi) | Ψ -value (W/mK) | Temperature factor (fRsi) |
| | Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21 | | Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15 | | Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15 | |
| Mannok Aircrete Super | 0.108 | 0.95 | 0.057 | 0.95 | 0.066 | 0.95 |
| Mannok Aircrete Standard | 0.111 | 0.95 | 0.062 | 0.95 | 0.071 | 0.95 |
| Mannok Aircrete Seven | 0.112 | 0.95 | 0.063 | 0.95 | 0.074 | 0.95 |